07/12/2002 FRI 13:19 FAX 2489888363 CARLSONGASKEYOLDS026096

SUN 27 '02 10:12

FROM TIS INT PROP DEPT

T() 8248 8363

PAGE.018/020

**2**009/025

## **EUROPEAN PATENT OFFICE**

## Patent Abstracts of Japan

PUBLICATION NUMBER PUBLICATION DATE

11035246

APPLICATION DATE
APPLICATION NUMBER

: 22-07-97 : 09195705

APPLICANT : HITACHI BUILDING SYST CO LTD;


INVENTOR : HATSUTORI SHIGENORI;

INT.CL. : B66B 5/02 B66B 7/12

TITLE : DETECTION METHOD FOR

DEGRADATION OF MAIN ROPE OF

ELEVATOR

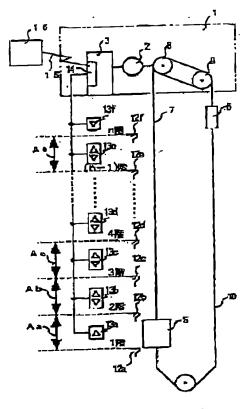

ABSTRACT :

PROBLEM TO BE SOLVED: To provide a detection method for degradation of a main rope in an elevator which can easily detect the local degradation of the main rope.

SOLUTION: Call register signals of a car 5 to be output from each of call buttons 13a-13e of the car 5 are input in a processor 14 in a control unit 3, and also the travelling times of the car 5 in regions Aa-Ae among floors are calculated by the processor 14 based on the call register signals. The obtained travelling record data of the car 5 are compared with predetermined decision values for degradation to specify the region between certain floors where the car 5 travels most frequently, for example, a region Aa between a first floor 12a and a second floor 12b. Then, the local degradation of a main rope 7 is inspected by confirming a portion of the main rope 7 which corresponds to the region Aa.

COPYRIGHT: (C)1999,JPQ